



NOTE:
 -FOLLOW GEOGRID MANUFACTURER'S INSTRUCTIONS FOR REINFORCEMENT PLACEMENT AT CURVES AND CORNERS.
 -DO NOT PLACE OVERLAPPING GEOSYNTHETIC LAYERS DIRECTLY ON TOP OF EACH OTHER. PROVIDE 3" OF SOIL FILL BETWEEN OVERLAPPING LAYERS.

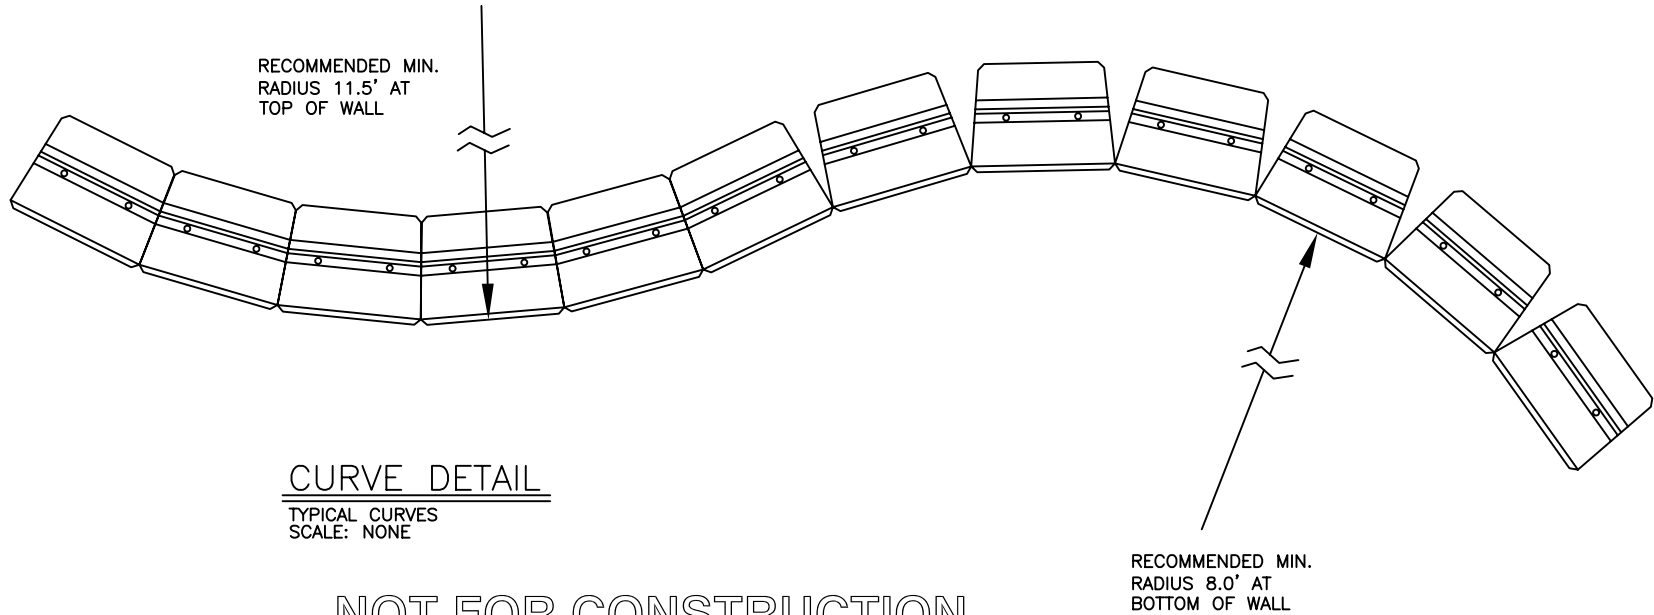

CURVE DETAIL
 TYPICAL CURVES
 SCALE: NONE

NOT FOR CONSTRUCTION

THESE PRELIMINARY DETAILS ARE INTENDED AS AN AID IN DESIGNING ATTRACTIVE, DURABLE RETAINING WALLS WITH VERSA-LOK STANDARD UNITS. FINAL DETERMINATION OF THE SUITABILITY OF ANY INFORMATION OR MATERIAL FOR THE USE CONTEMPLATED, AND ITS MANNER OF USE, IS THE SOLE RESPONSIBILITY OF THE USER. A FINAL PROJECT SPECIFIC DESIGN SHOULD BE PREPARED BY A QUALIFIED, LICENSED, PROFESSIONAL ENGINEER.



VERSA-LOK®
 Retaining Wall Systems

(800)770-4525 fax(651)770-4089
 6348 Hwy36 Ste1, Oakdale,MN 55128 **Solid Solutions™**

BRUTE DETAILS

CURVES

SCALE:	AS NOTED
DRAWN BY:	PPS
CHECKED BY:	
DATE:	10/04
DWG. NO.	brute curves